


Технические данные

Опоры без изоляционных вставок

Труба DN	Труба D	Хомут В [мм]	Хомут Ш x Т [мм]	Болты
25	33.7	97	30 x 5	M10 x 35
32	42.4	106	30 x 5	M10 x 35
40	48.3	112	30 x 5	M10 x 35
50	60.3	136	40 x 6	M12 x 40
65	76.1	152	40 x 6	M12 x 40
80	88.9	164	40 x 6	M12 x 40
100	114.3	163	40 x 8	M12 x 45
125	139.7	180	40 x 8	M12 x 45
150	168.3	197	40 x 8	M12 x 45
200	219.1	246	50 x 8	M16 x 55
250	273.0	289	50 x 8	M16 x 55
300	323.9	340	50 x 8	M16 x 55
350	355.6	372	60 x 8	M16 x 55
400	406.4	423	60 x 8	M16 x 55
500	508.0	528	70 x 10	M20 x 60
600	610.0	630	70 x 10	M20 x 60

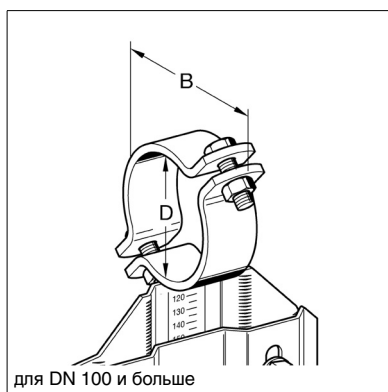

Опоры с изоляционными вставками

Труба DN	Труба D	Толщина изоляции [мм]	Длина изоляции [мм]	Хомут В [мм]	Хомут Ш x Т [мм]	Болты
25	33.7	50	100	173	40 x 6	M10 x 40
32	42.4	50	100	180	40 x 6	M10 x 40
40	48.3	50	100	183	40 x 6	M10 x 40
50	60.3	50	100	195	40 x 6	M12 x 40
65	76.1	60	100	222	40 x 6	M12 x 40
80	88.9	60	100	230	40 x 6	M12 x 40
100	114.3	60	200	257	40 x 8	M12 x 50
125	139.7	60	200	275	40 x 8	M12 x 50
150	168.3	60	200	307	40 x 8	M12 x 50
200	219.1	60	200	358	50 x 8	M12 x 50
250	273.0	60	200	412	50 x 8	M16 x 55
300	323.9	80	200	503	50 x 8	M16 x 55

